




Item# _____

Job _____

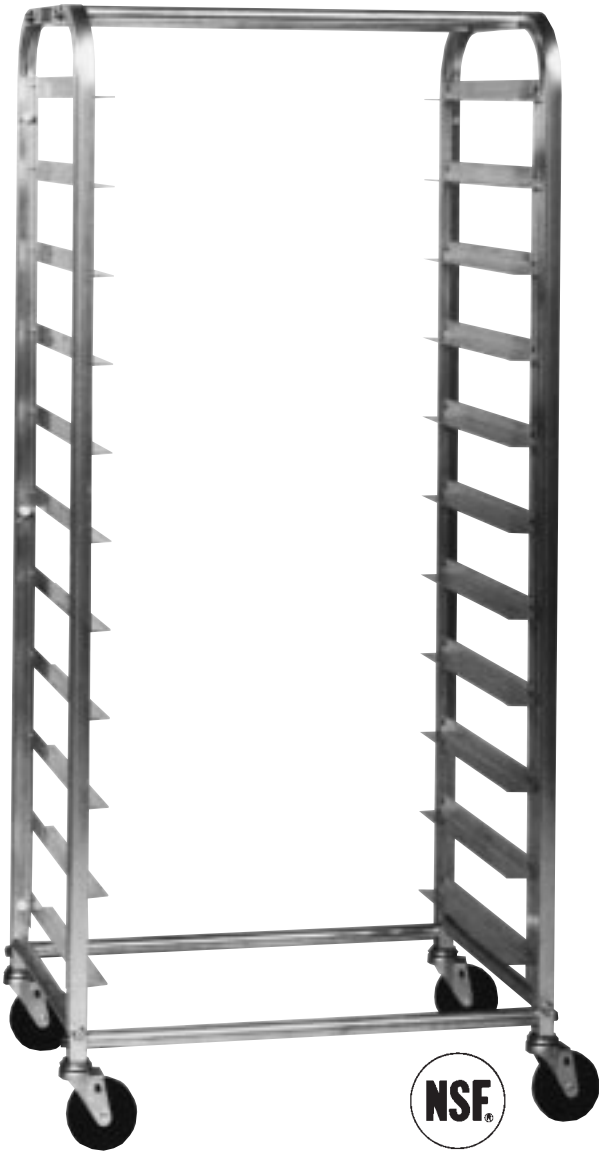

RT3511N

Metro Mobile SIDE LOAD “KNOCK DOWN” RACKS

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Tubular framework with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slide assemblies for easy cleaning.
- **Versatile:** Slide assemblies can be replaced with slides of other than standard spacing while retaining the same framework.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Stable:** 5” (127mm) diameter, NSF-listed casters, corner-mounted for maximum stability.
- **Lightweight:** Easy to handle.
- **Rapid Cooling**



Note: Available factory set-up. See price list.



Metro Mobile SIDE LOAD “KNOCK DOWN” RACKS

Specifications

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction on slide assemblies, tensilok fasteners for frame assembly.
- **End Frames:** 1" (25mm) square x .093" (2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **Slides, 1 1/2" (38mm) Spacing:** .060" x 1/2" x 1 1/2" (1.5 x 13 x 38mm) profile, bulb-tipped extruded channel-riveted to .060" x 1" x 1" (1.5 x 25 x 25mm) angle uprights.
- **Casters:** Two HS5M on back — 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle. Two HS5MB on front — same as above with wheel brake. NSF listed.
- **Slides, 3" (76mm) & 5" (127mm) Spacing:** .060" x 1 1/4" x 1 1/2" (1.5 x 32 x 38mm) profile, bulb-tipped extruded angle-riveted to .060" x 1" x 1" (1.5 x 25 x 25mm) angle uprights.

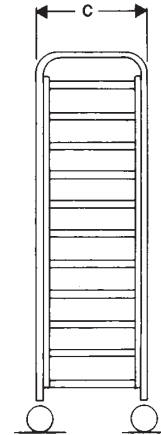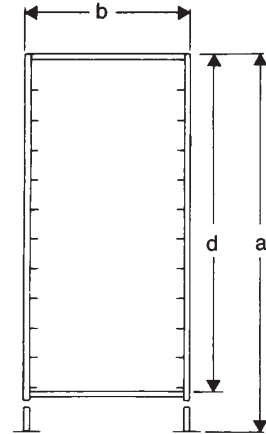

DIMENSIONS:

| Model No. | (a) Height | | (b) Width | | (c) Depth | | (d) Inside Height | | Slide Spacing | | Pan Capacity | | Shipping Weight | |
|-----------|---------------|------|--------------|------|--------------|------|----------------------|------|---------------|------|--------------|------------|-----------------|------|
| | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | no. | size (in.) | (lbs.) | (kg) |
| RT3318N | 64 1/8 | 1630 | 28 3/8 | 720 | 18 3/4 | 475 | 56 1/2 | 1435 | 3 | 76 | 18 | 18 x 26 | 40 | 18 |
| RT3511N | 64 1/8 | 1630 | 28 3/8 | 720 | 18 3/4 | 475 | 56 1/2 | 1435 | 5 | 127 | 11 | 18 x 26 | 38 | 17 |

ACCESSORIES:

- Model _____
- SU Factory Set-Up _____
- A38 Gray Rubber Corner Bumpers _____