



TIM CAMPBELL 800-400-7500

Item # _____

Job _____

METRO® ENCLOSED DISPLAY CABINET

- **Durable:** Strong, lightweight aluminum construction. Extruded aluminum doors with clear polycarbonate window.
- **Ergonomic:** Clear Dutch-Doors with lift-off hinges, replaceable gaskets, and lever action magnetic latches located at a user-friendly height.
- **Versatile:** Use for storage or display of bread and other products.
- **Removable Sides:** Are easily removed and inserted for cleaning or to increase slide spacing.
- **3 1/4" (83mm) Slide Spacing**
- **Cabinet capacity:** (18) 18"x26" (457 x 660mm) Full-size sheet pans; (36) 13" x 18" (330 x 457mm) Half-size sheet pans
- **Sanitary:** Smooth, easy-to-clean interior.
- **Stable:** Four 5" (127mm) diameter, NSF listed, casters, front two with brakes.
- **Vented Top:** To control internal cabinet conditions. Accessible and visible from front of cabinet.
- **NSF Listed**




DPD72N-DD
Enclosed Display Cabinet



ENCLOSED DISPLAY CABINET

Specifications

- **Material:** High strength, natural finish, aluminum.
- **Sides and Top:** .063" (1.8mm) brake-formed aluminum.
- **Base:** .100" (2.9mm) brake-formed aluminum.
- **Construction:** Aircraft riveted construction throughout.
- **Slides:** Removable bulb-tipped extruded .088" (2.5mm) aluminum angle.
- **Casters:** 5" (127mm) diameter, NSF listed, swivel rubber plate casters, front two with brakes.
- **Door:** Extruded aluminum frame with clear PETG window swings 180 degrees; lift-off hinges; high pull-strength lever action magnetic latch with mechanical release, continuous removable gasket.
- **Vent:** Slide action adjustable vent accessible from front of cabinet.

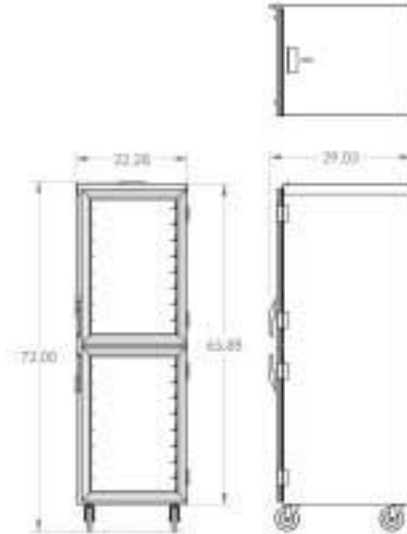

DPD72N-DD

Cat. No.	Width/Height/Length		No.	Pan Capacity		Approx. Pkd. Wt.	
	(in.)	(mm)		(in.)	(mm)	(lbs.)	(kg)
DPD72N-DD	22 ^{3/8} x72x28 ^{3/4}	568x1828x730	18	18x26	457x660	95	43.1
			or 36	13x18	330x457		

Note: Brakes are standard on two casters, for the units listed above.