



TIM CAMPBELL 800-400-7500



Item # \_\_\_\_\_

Job \_\_\_\_\_

# Metro C5 6 Series Heated Holding Cabinet

- **Control:** The 6 Series provides control of temperature for safe and hot food. Temperature is displayed on an “always-on” analog thermometer for continuous monitoring of the cabinet temperature, even when turned off or unplugged.
- **Performance:** Rapid heat-up and recovery times are achieved with a thermostatically controlled ducted heating system.
- **Passive Humidity:** An integral water pan system can be used to add humidity to the cabinet environment, improving food quality.
- **Configurations:**
  - Sizes: Full Height, 3/4 Height, 1/2 Height, and Under Counter.
  - Doors: Full Length Solid, Full Length Clear, Dutch Solid, Dutch Clear. All are lift off and field reversible.
  - Reach-In or Pass-Thru (not available on under counter).
  - Materials: Stainless Steel and Aluminum.
- **Capacity:** Universal slides hold 18"x26" sheet pans or 12"x20" steam table pans on adjustable 1 1/2" increments. Lip load slides hold 18"x26" sheet pans on 1 1/2" increments. Optional Wire Shelf interfaces with universal slide system to accommodate small items and pans.
- **Reliability:** Reliability and durability are designed into C5 from the ground up. High-quality components and robust construction provide a long life of service and worry-free use.
- **Top-Mounted Controls:** Ergonomic user-friendly controls are mounted at the top of the cabinet for easier access, better readability, to prevent damage, and to simplify cleaning.
- **Energy Star:** Full Height, 3/4 Height, and 1/2 Height models are Energy Star.



Full Height Dutch Solid Doors



Under Counter Full Solid Door    1/2 Height Full Clear Door    3/4 Height Full Solid Door    Full Height Dutch Clear Doors    Full Height Full Solid Door

### 6 Series Controller:

- **Temperature:** The easy-to-use dial puts you in control of cabinet temperature.
- **Reliable Readout:** Measures and displays actual cabinet temperature even when the cabinet is off.
- **Analog Thermometer:** An “always-on” thermometer makes it ideal for transport applications.

Electro-Mechanical Control of Temperature

Reliable Analog Thermometer



\*Patents Pending



# Metro C5 6 Series Heated Holding Cabinet

TIM CAMPBELL 800-400-7500

## Specifications


- **Cabinet Material:** Type 304 stainless steel; 20-gauge polished exterior; 22-gauge interior, or .063" aluminum, brushed exterior, natural interior.
- **Insulation:** Full perimeter, 1" thick, high-density fiberglass. R Value=4.2
- **Casters:** Four casters with 5" donut neoprene wheel, double ball bearing swivel, ball bearing axle, nickel plated, two with brake. 3" rubber casters on Under Counter models.
- **Doors:**
  - Solid doors are fully insulated, double-panel construction.
  - Clear doors are double-pane, tempered glass. Argon filled with Low-E coating.
- **Hinges:** Self-closing, lift-off, double hinged, with long-life nylon bearings.
- **Gaskets:** High temperature, cabinet mounted, Santoprene gaskets.
- **Latches:** Chrome plated, high-strength magnetic pull latch with lever-action release.
- **Handles:** Four built-in polymer handles.
- **Universal Slides:** Universal wire slides; 1/4" diameter nickel-chrome wire adjustable on 1 1/2" increments. 16-gauge, Type 304, stainless steel vertical standards.
- **Lip Load Slides:** 1 1/2"x1 1/2"x.063" extruded aluminum channel slides on .063" Aluminum vertical standards.
- **Slide Capacities:**

Cabinet Size	Universal Slides				Lip Load Slide Pan Capacity 18"x26"
	Slide Pairs Provided	Max.*	Pan Capacity** 18"x26"	12"x20"x2 1/2"	
Full Height	18	37	18	36	36
Full Height/Dutch	18	35	17	34	35
3/4 Height	14	29	14	28	29
1/2 Height	8	17	8	16	17
Under Counter	5	10	5	10	10

\*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.

\*\*Capacity based on standard number of slide pairs provided on 3" spacing.

- **Display and Controls:** Analog cabinet thermometer with independent thermostat control knob.
- **Heat Generation System:** Thermostatically controlled 1950 Watt heating element, ball bearing blower motor, and ducted air system.
- **Cord:** 7 1/2' cord with NEMA 5-20P plug. Cord mounted on top (Full, 3/4, Pass Thru) or back (1/2, Under Counter) can be field reversed.
- **Thermal Performance:** 70° F to 200° F operating temperature range.
- **Minimum Clearances from Enclosures:** 1 1/2" clearance from cabinet walls on sides and back. 6" clearance is required on top.
- **Dimensions:**

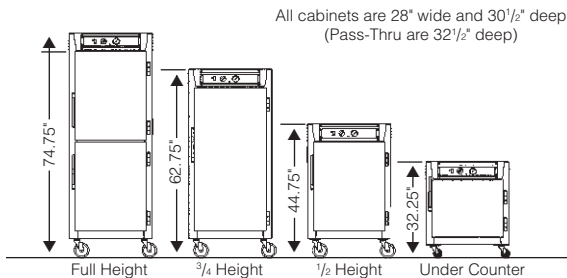

### Reach-In Model Number Description

Cabinet Height  
9 = Full Height  
7 = 3/4 Height  
5 = 1/2 Height  
3 = Under Counter

Door Style  
FS = Full Length Solid  
FC = Full Length Clear  
DS = Dutch Solid \*  
DC = Dutch Clear \*

Slide Type  
U = Universal Wire  
L = Lip Load Aluminum

**C569-SDS-U**

Cabinet Material  
S = Stainless  
N = Aluminum



For Standard  
Wattage Cabinets  
(120V, 16A, 60Hz, 2000W)

\*Please note: Dutch doors only available on full-size models.

Pass Thru\* Door Style

### Pass-Thru Model Number Description

**C569-SDS-UPDS**

\*Please note: Pass-Thru is only available on Full Height, 3/4 Height, and 1/2 Height Models.

### Low Watt Model Number Description

**C569L-SDS-U**



Add "L" for Lower  
Wattage Cabinets  
(120V, 12A, 60Hz, 1440W)

### Export Model Number Description

**C569X-SDS-U**



Add "X" for  
Export Cabinets  
(220-240V, 7.6-8.3A,  
50/60Hz, 1681-2000W)

### Models with Accessories or Options

**C569-SDS-UA**

**C569-SDS-UPDSA**

An "A" suffix indicates  
that accessories need  
to be factory assembled  
to the cabinet. Order  
accessories separately.

### Available Accessories:

- Flush Latch Handle (C5-LATCHFLUSH) \*
- Twist Locking Handle (C5-LATCHTWST) \*
- Key Locking Latch Handle (C5-LATCHLOCK) \*
- Stainless Steel Handles (C5-HANDLE)
- Bumper & Drip Trough (C5-BUMPDRIP)
- Full Perimeter Bumper (C5-PERMBUMP)
- Twist Lock Plug (C5-RTWSTPLG)
- Right Angle (P-Style) Plug (C5-RTANGPLG)
- Control Panel Cover (C5-COVER)
- 5" Rear Rigid Casters (C5-5RDGCSTR)
- 6" Casters (C5-6CASTER)
- 6" Stainless Steel Legs (C5-SSLEGS)
- Chrome Universal Slide Pair (C5-USLIDECPR)
- Stainless Steel Universal Slide Pair (C5-USLIDESPR)
- Stainless Steel Universal Slide Upgrades
  - Full Height (C5-SSUSLIDE-9)
  - 3/4 Height (C5-SSUSLIDE-7)
  - 1/2 Height (C5-SSUSLIDE-5)
  - Under Counter (C5-SSUSLIDE-3)
- Small Item Shelf (C5-SHELF)
- Factory Left-Hand Hinging (DD3768)
- Factory Same-Side Pass-Thru Door Hinging (C5-SAMESIDE)

\*Please note: (1) handle must be ordered for each door (i.e. — dutch doors require (2) handles; pass-thru dutch doors require (4) handles)