



TIM CAMPBELL 800-400-7500

Item # _____

Job _____

HD SUPER™ DUNNAGE SHELVES

HDR Series

- **Superior Strength:** Dunnage shelves offer up to 133% more weight-bearing capacity than other HD Super shelves and can be combined with them to provide extra strength at the lower levels of a shelving unit where the heaviest loads will be placed. The 48" (1220mm) length has a 3,000-pound (1365kg) uniformly distributed static load capacity; the 60" (1520mm) shelves hold up to 2,400 pounds (1092 kg).
- **Stress Resistance:** The high static-load capacity of the HD Super dunnage shelf translates into an increased ability to stand up under the strain of unbalanced loads and the stress of materials repeatedly being placed on the shelf in a less-than-gentle way.
- **HD Super™ Construction:** These dunnage shelves have the same tapered corners and split sleeves that fit the 1½" (41mm) posts used for other HD Super shelves. As a result, they assemble easily, fit securely and are compatible with 48 different HD Super shelf types and sizes.
- **Two-Piece Design:** Removable wire deck fits over reinforced 1½" (38mm) square, tubular frame. It lifts off for easy, thorough cleaning.
- **Smooth Loading/Unloading:** The front to back upper ribs of the deck allow you to slide items on and off the shelves smoothly.
- **Adjustable:** Rolled grooves on the posts enable dunnage shelves to be positioned or repositioned at desired levels in 2" (51mm) increments.
- **Finishes:** Available in chrome-plated, Metroseal II™ or stainless steel.



If solid shelves are to be used in a cooler in conjunction with Metroseal™ dunnage shelves and posts, solid shelves should be stainless steel.




Job _____

HD SUPER™
DUNNAGE SHELVES
HDR Series



Specifications

- **Shelves:** The shelf support frame is made of 1½" (38mm) square tubing. The removable wire deck is formed from 5/16" (7.9mm) diameter wire.
- **Posts:** Posts have an outside diameter of 1½" (41mm) with rolled grooves in 2" (51mm) increments along entire height. Available in chrome-plated, Metroseal II™ or stainless steel.

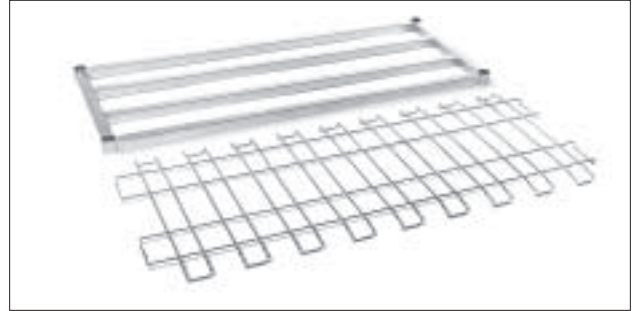

Dimensions

Shelves

Cat. No. Chrome	Cat. No. Metroseal II	Cat. No. Stainless	Width		Length		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
1848HDRC	1848HDRK2	1848HDRS	18	455	48	1220	35	16
1860HDRC	1860HDRK2	1860HDRS	18	455	60	1525	43	19
2448HDRC	2448HDRK2	2448HDRS	24	610	48	1220	38	17
2460HDRC	2460HDRK2	2460HDRS	24	610	60	1525	47	21

Posts

Cat. No. Chrome	Cat. No. Metroseal II	Cat. No. Stainless	Height*		Approx. Pkd. Wt.	
			(in.)	(mm)	(lbs.)	(kg)
54HPC	54HPK2	54HPS	56	1420	5.8	2.6
63HPC	63HPK2	63HPS	64	1625	6.3	2.9
74HPC	74HPK2	74HPS	76	1930	7.5	3.4

*Height includes leveling bolt and cap.

Cantilever Shelf

Cat. No. Chrome-plated	Cat. No. Stainless	Fits Units	Width		Length		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
1254CHC	1254CHS	60" (1525mm) long	12	305	54	1370	11.8	5.4
1260CHC	1260CHS	72" (1825mm) long & 96" (2439mm) long	12	305	60	1525	12.7	5.8

Hook

Cat. No. Chrome-plated	Cat. No. Stainless	Width		Depth		Height		Approx. Pkd. Wt.	
		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
HK23C	HK23S	3/8	9	1 1/16	42	3 7/16	87	0.1	0.04

Important: Stability decreases as the ratio of height to width increases when heavier loads are placed on upper shelves. Keep units as wide and low as possible, using the dunnage shelf as the bottom shelf. If two dunnage shelves are being used, both should be placed within the lower half of the unit.