




Item# _____

Job _____

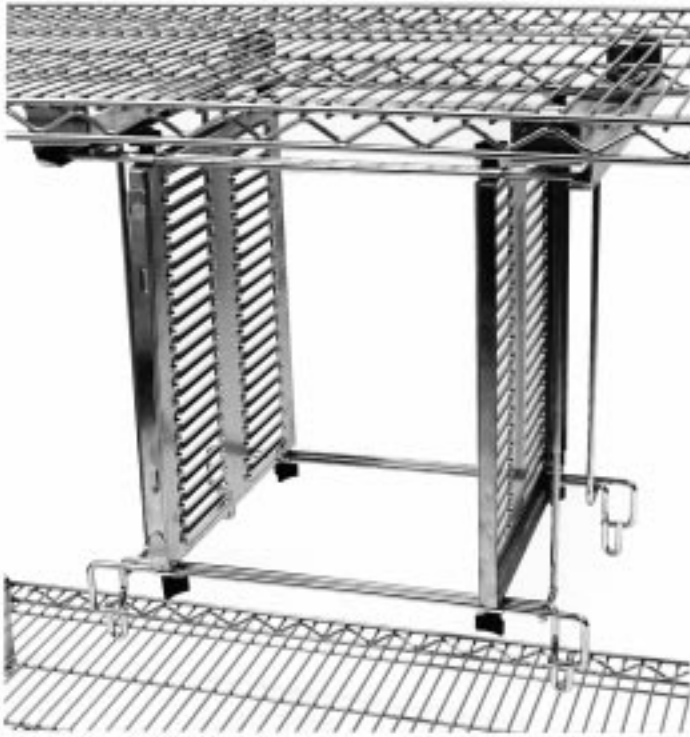

PCB CARRIER ACCESSORIES

Undershelf Slides (USCBC)*

- **Store/Transport Circuit Board Carriers:** Transform any Super Erecta Shelf® unit — mobile or stationary — into a storage/ transportation center for Metro Printed Circuit Board Carriers. Slides are easily mounted under Super Erecta Shelf® wire shelves.
- **Long Life:** Chrome-plated steel provides long life even with heavy usage.
- **Easy Assembly:** Slides attach to underside of wire shelf with 4 support brackets and screws.
- **Safety “Stops”:** Both ends of the 5/8” (12.7mm) lip on the slide bend upward to help prevent the carrier from sliding out of place.

* **Note:** Slides and CB Carriers are conductive. To make entire unit conductive, shelving must be ordered without aqualac and with aluminum split sleeves. if mobile, it must be equipped with conductive casters and/or grounding chain (ASK16S).

DIMENSIONS:

Cat. No.	Width		Length		Height		Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
USCBC	2 1/4	57	16 13/16	425	2 1/4	57	2	1.1



PCB CARRIER ACCESSORIES

PT Trucks for PCB Carriers* (Also found under Cat. No. 16.60)

- **Provide Efficient Handling** of circuit board carriers and other parts handling containers.
- **Super Erecta Shelf Construction:** Provides positive placement and easy vertical relocation of slides without disassembling the unit.
- **Choice of Casters:** Choose either resilient or polyurethane tread casters. Four 5" (127mm) casters, standard.
- **Standard Unit:** Will transport six CBC11C carriers (two on each of three levels). Also handles TB22 tote boxes.
- **Adjustable Unit:** Width can be changed with a socket wrench for an overall adjustment of $8\frac{3}{4}"$ (222mm). This unit will carry TB22 tote boxes, CBC11C and CBC13C carriers.
- **Versatile:** Standard units are available without slides or with three sets of slides. Slides may be added as required. The distance between slides can be adjusted vertically on the standard unit, horizontally and vertically on the adjustable unit.

* If conductive units are wanted, they can be ordered with grounding chain and bracket. (GCB16S)




OUTSIDE DIMENSIONS:

Model No.	Depth		Width		Height		Caster	Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)		(lbs.)	(kg)
PT1C-5M	26	660	$22\frac{5}{8}$	575	68	1725	Resilient	56	25
PT1C-5MP	26	660	$22\frac{5}{8}$	575	68	1725	Polyurethane	56	25
APT1C-5M	26	660	Adjustable †		68	1725	Resilient	54	24
APT1C-5MP	26	660	Adjustable †		68	1725	Polyurethane	54	24

† Width is adjustable from $20\frac{3}{8}"$ to $29\frac{3}{8}"$ (525 to 745mm).

The models above are equipped with six S3C slides (three sets). Additional slides may be added as needed.

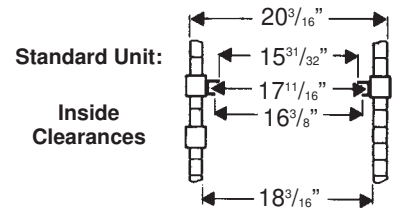

Slides

Cat. No.	Description	Width		Length		Approx. Pkd. Wt.	
		(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
S3C	Combination Slide Single	$\frac{7}{8}$	22	24	610	$1\frac{1}{2}$	$\frac{3}{4}$

Double-bay and triple-bay units are also available. Contact your InterMetro representative.

