



TIM CAMPBELL 800-400-7500

Item # _____

Job _____

METRO MOBILE OVAL TRAY RACK

- **Material:** Special design, natural finish, high-strength, extruded aluminum 96063-T6 alloy) framework with 8-gauge brake-formed slides.
- **Rugged:** Double-riveted aircraft construction throughout . . . built to last.
- **Pass-thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Sanitary:** Easy to clean.
- **Lightweight:** Maneuvers easily.
- **Space Saving**
- **Ideal for Banquet Service**






METRO MOBILE OVAL TRAY RACK

Specifications

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction throughout.
- **Corner Posts:** $1\frac{1}{2}'' \times 1\frac{1}{2}'' \times \frac{1}{8}''$ (38 x 38 x 3mm) angle-shape.
- **Top & Bottom:** $1\frac{1}{2}'' \times 1\frac{1}{2}'' \times \frac{1}{8}''$ (38 x 38 x 3mm) angle-shape riveted to four corner posts.
- **Casters:** Two B5DN on back—5" (127mm) double ball bearing swivel, ball bearing axle, nickel-plated, donut neoprene-tired, prelubricated, bolted to full-length, 14-gauge channel to bottom frame. Two B5DNB on front— same as above with wheel brake.
- **Slides:** Special design 5" (127mm)-wide slide fabricated from high-strength, .125 (3mm) aluminum, double-riveted to corner posts.
- **Load Rating:** 20 lbs. (9 kg) per level, not to exceed 350 lbs. (159 kg) per unit.

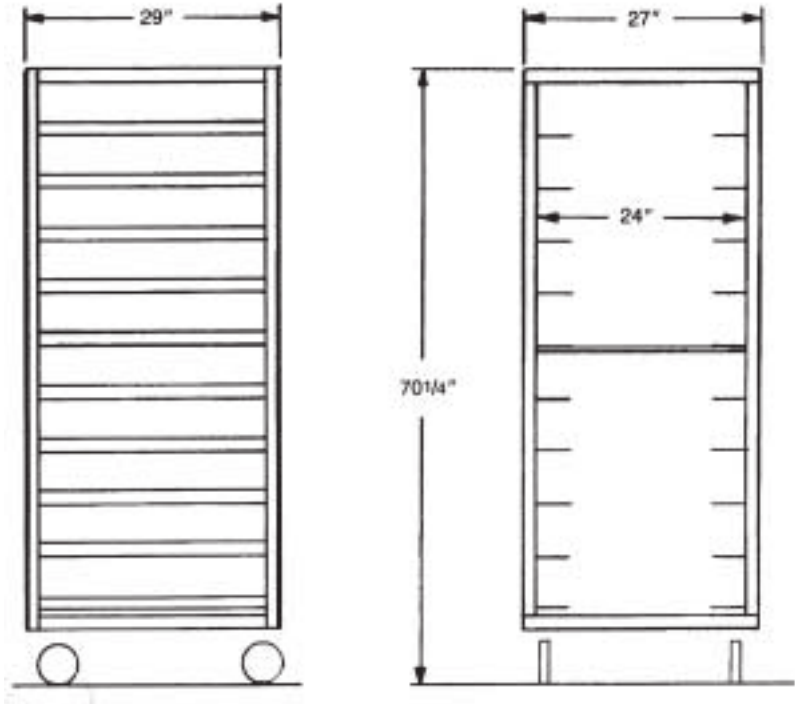

Dimensions

Cat. No.	Height		Width		Depth		Slide Spacing		Pan Capacity		Shipping Weight	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	No.	Size(in.)	(lbs.)	(Kg)
RD27N	70 ¹ / ₄	1785	27	685	29	735	6	152	10	22 ³ / ₄ x 27 ⁵ / ₈	88	40

Accessories

Model	Description
A33RD	Gray Continuous Bumper
A37	Gray Corner Bumpers
A71	Floor Lock
A120	Pan Stop